



NOTE

- **CAUTION:** The Lighted Power Strip (LPS) must be installed by a licensed electrician in conformance with the current NEC® and local building/electrical codes.
- Power source **MUST** be a 20-amp branch circuit protected by a GFCI at the panel or GFCI prior to the connection at LPS.
- Light valance recommended.
- If pre-wired wires from factory are cut, this will void the warranty and UL listing.
- Firmly insert plug straight into receptacle, applying equal pressure to both blades at the same time. **Gently** rock plug, if needed.



Tools Needed

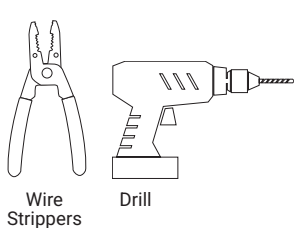


Optional Tools



Product Legend

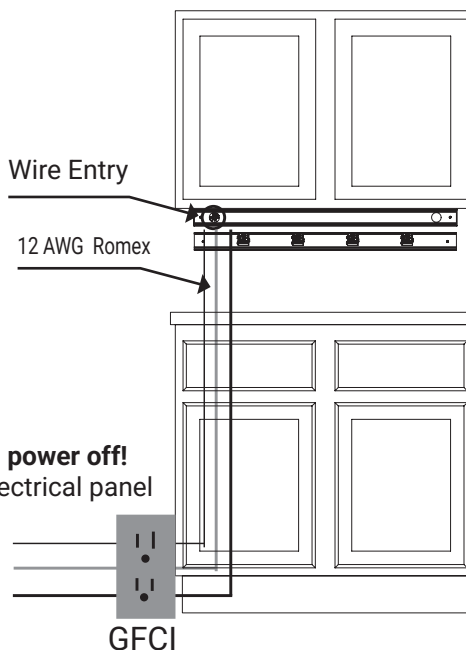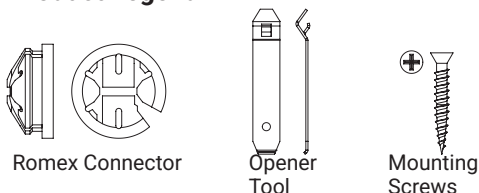

Section Drawing

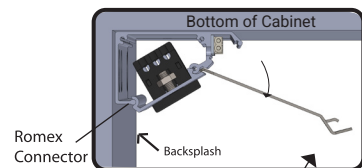

Turn power off at panel.
Carefully pry open each piece with tool (provided). Insert Romex connector into knockout hole inside of back frame. Pull wires into the Lighted Power Strip.

Remote Driver—120V Entry

- Step 1** Secure LPS to bottom of cabinet with pre-drilled mounting holes or to the wall by screwing into wall studs or use anchors provided. Connect BLACK to BLACK, WHITE to WHITE. Ground all GREEN wires to Grounding Studs inside of back frame.
- Step 2** When connecting two LPS, run Romex from fixture to fixture. Ground each section to the next.
- Step 3** To terminate last LPS, use wire nuts on ends of wires.

Remote Driver—Low Voltage Entry

- Step 4** Using appropriate knockout hole, pull low voltage wire from remote power supply into the low voltage space, connect BLACK wire (negative) to BLACK wire from lights and RED wire (positive) to RED wire.
- Step 5** Snap cover in place and turn power on.

