



NOTE

- CAUTION: The Lighted Power Strip (LPS) must be installed by a licensed electrician in conformance with the current NEC® and local building/electrical codes.
- Power source MUST be a 20-amp branch circuit protected by a GFCI at the panel or GFCI prior to the connection at LPS.
- Light valance recommended.
- If pre-wired wires from factory are cut, this will void the warranty and UL listing.
- Firmly insert plug straight into receptacle, applying equal pressure to both blades at the same time. **Gently** rock plug, if needed.



Tools Needed

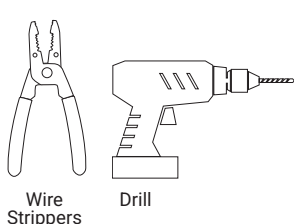


Optional Tools



Product Legend

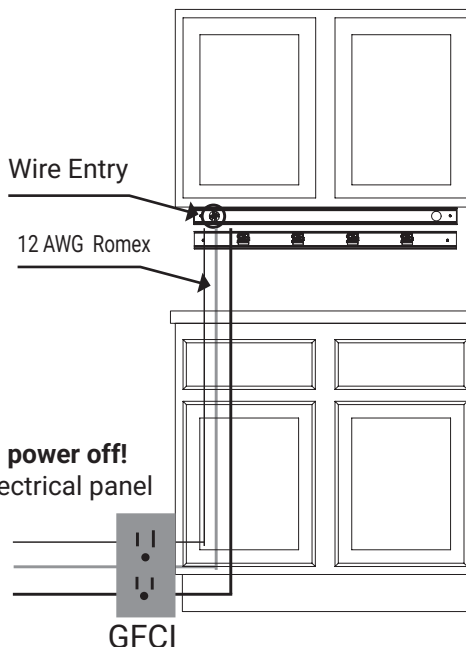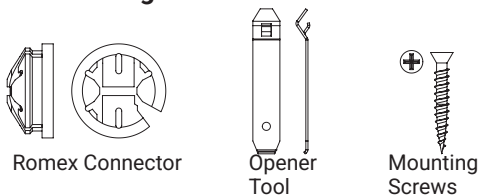

Section Drawing

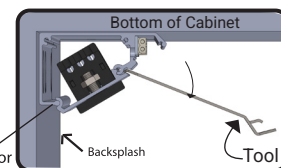

Turn power off at panel. **Carefully** pry open each piece with tool (provided). Insert Romex connector into knockout hole inside of back frame. Pull wires into the Lighted Power Strip.


Step 1 Secure LPS to bottom of cabinet with pre-drilled mounting holes or to the wall by screwing into wall studs or use anchors provided. Connect BLACK Romex wire from receptacles and switch. Connect WHITE Romex wire to WHITE wire from receptacles and driver. Ground all GREEN wires to Grounding Studs inside of back frame.

Step 2 When connecting 2 or more LPS fixtures, run Romex from fixture to fixture. Ground each section to the next.

Step 3 To terminate last LPS, use wire nuts on ends of wires.


Step 4 Snap cover in place and turn power on.

Wiring Diagram for Combined Light & Receptacle Circuit - Non Dimmable

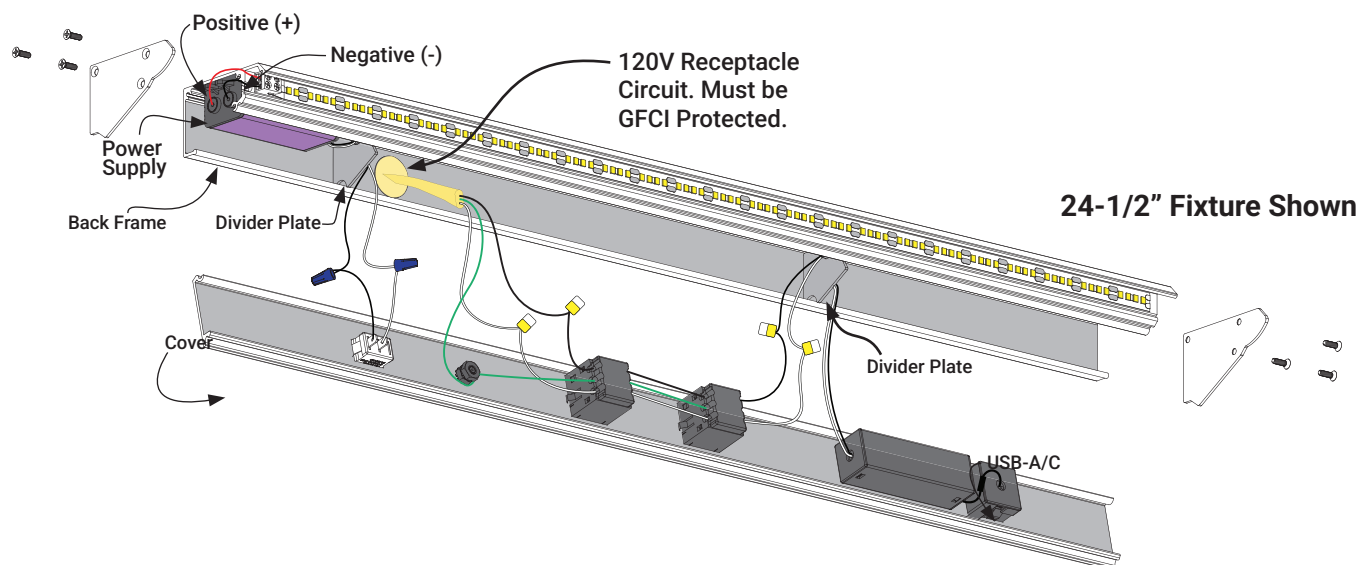


General Guidelines

- Power source **MUST** be a 20 amp branch circuit protected by a GFCI at the panel or GFCI prior to the connection at LPS.
- All wiring must meet NEC® and local codes.
- Light valance recommended.
- Firmly insert plug straight into receptacle, applying equal pressure to both blades at the same time. **Gently** rock plug, if needed.

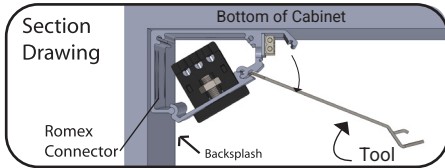

Turn power off at panel. **Carefully** pry open each piece with tool (provided). Insert Romex connector into knockout hole inside of back frame. Pull wires into LPS.

Wiring for Separate Light and Receptacle Circuits

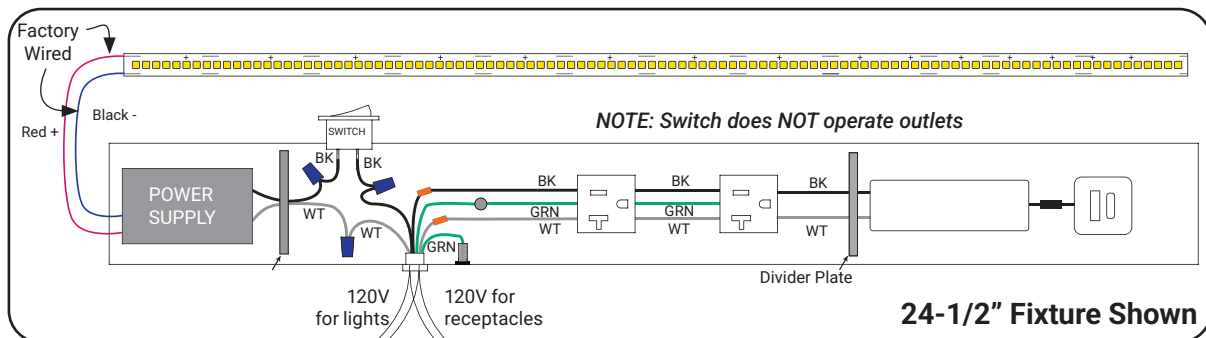

Step 1 Secure LPS to bottom of cabinet with pre-drilled mounting holes or to the wall by screwing into wall studs or use anchors provided. If running two circuits, one for receptacles, one for lighting, connect fixture wires to appropriate Romex wires. BLACK to BLACK. WHITE to WHITE. Ground all GREEN wires to Grounding Studs inside of back frame.

Step 2 When connecting 2 or more LPS fixtures, run Romex from fixture to fixture. Ground each section to the next.

Step 3 To terminate last LPS, use wire nuts on ends of wires.

Step 4 Snap cover in place and turn power on.

Wiring Diagram for Separate Light & Receptacle Circuits

