


400 Lumens/Ft. Lighted Power Strip with USB-A/C

Single-White DV USB Series (USB-A/C Included; Built-In Power Supply)



24" fixture shown in Satin Nickel
with Grey receptacles
LPU36S4DGSN27

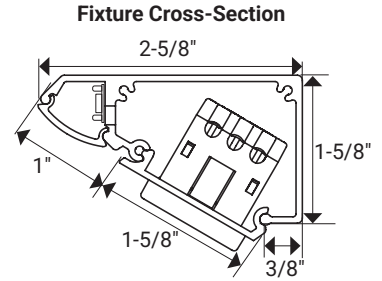

120V Receptacles
12V LED lighting



Ordering Information—LPS DV USB Series (Standard Options Only)

400 Lumens/ft. 120-volt Receptacles; 12-volt LED Lighting

Kelvin Temperature	Length	Total Lumens	Total Watts	Number of USB-A/C Devices	Number of Receptacles	Part Number
2700K, 3000K, 4000K, 5000K	24-1/2" (622 mm)	800	12	1	2	LPU Location 24S4D Color Finish Temp
2700K, 3000K, 4000K, 5000K	30-1/2" (775 mm)	1000	15	1	3	LPU Location 30S4D Color Finish Temp
2700K, 3000K, 4000K, 5000K	36-1/2" (927 mm)	1200	18	1	3	LPU Location 36S4D Color Finish Temp

Blue indicates dealer choice: Location (L) or (R) indicates USB-A/C device side placement Color indicates receptacle color and Finish indicates fixture finish color. Temp indicates Kelvin temperature.

NOTE: The USB-A/C device can be located on the Left Side (L) or Right Side (R) of the fixture. Wire entry and built-in power supply are always opposite of device placement.
LPU36S4DBBK27 (Example part number for LPS Single-White DV USB Series, with USB-A/C located on right side, Black receptacles, and Black finish in 2700 Kelvin temperature)

About The Product

- Low profile: 1-5/8"
- LPS DV USB Series fixtures have one switch and one USB-A/C device per fixture and are **available in standard fixtures only**
- 20-amp tamper-resistant single receptacles
- Built-in power supply—direct replacement for a stand-alone fluorescent light that also provides power
- Standard fixture lengths and configurations on next page
- Never dim receptacles, dedicated 120V circuit can be run from wall dimmer and connected directly to integrated power supply
- Easy installation—ships fully assembled and includes wood screws and wall anchors
- No Ultraviolet (UV) or Infrared (IR)
- 50,000 hour LED life at 70% lumen maintenance
- UL listed

Applications

Under cabinet

Offices and computer labs

Shops and garages

For additional application help and suggestions, call Design Services at 866-848-9094

Available Finish Options with Coordinating Receptacle Color



Technical Information

Input Voltage	120-volts (receptacles) 12-volts (lighting)
Color Temperature (Kelvin)	Warm White 2700K (27) Soft White 3000K (30) Cool White 4000K (40) Daylight White 5000K (50)
CRI (Color Rendering Index)	90+
LED Type	SMD 2835
Lumens	400 lumens per foot
Max Run	Maximum recommended run length is 16 ft. for single-sided powering
Dimmable	5%–100%
Rating	cULus Listed
Rated Life	50,000 hrs
LED Beam Angle	120°
LED Spacing	1/4"
Mounting	Wood screws and wall anchors (included)
Wiring	12 gauge Romex for receptacles 18–20 gauge wire for LEDs
Operating Temperature	-4°F to 140°F (-20°C to 60°C)
Environment	Dry locations
Construction Material	Powder coated aluminum, IR acrylic (lens)
Warranty	5 years

Kelvin Temperature Options




Lumen Output



WITH BUILT-IN power supply, switch, USB-A/C device, high light output, 4-watts per foot


Left side USB-A/C

36-1/2" Fixture—LPUL36S4D Color Finish Temp

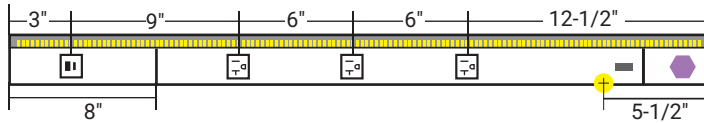


Right side USB-A/C

36-1/2" Fixture—LPUR36S4D Color Finish Temp

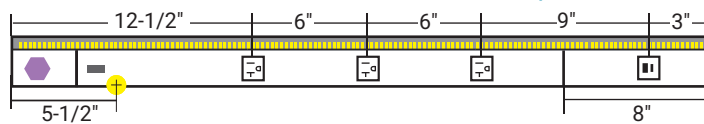


Left side USB-A/C

30-1/2" Fixture—LPUL30S4D Color Finish Temp

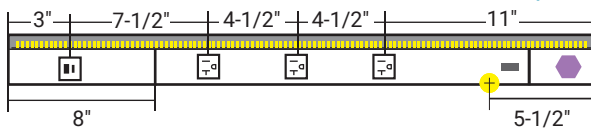


Right side USB-A/C

30-1/2" Fixture—LPUR30S4D Color Finish Temp

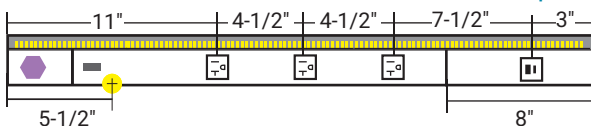


Left side USB-A/C

24-1/2" Fixture—LPUL24S4D Color Finish Temp

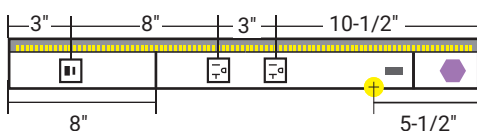





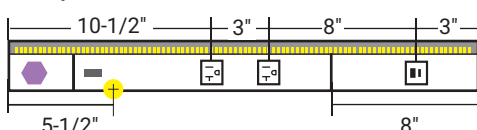

Right side USB-A/C


24-1/2" Fixture—LPUR24S4D Color Finish Temp



LEGEND

-  = 20-amp receptacle available in Black (B), Grey (G), or White (W)
-  = USB-A/C device available in Black (B), Grey (G), or White (W)
-  = Switch: 4-1/2" from right or left side (always located opposite the USB-A/C device); available in Black, Grey, or White
-  = Divider Plate: 3-1/2" for USB-A/C (right or left side) and 8" for USB-A/C (right or left side); low voltage
-  = Power Supply
-  = Knockout: 5-1/2" from right or left side (always located opposite the USB-A/C device); located on back frame

LPS DV USB with USB-A/C device on the right side

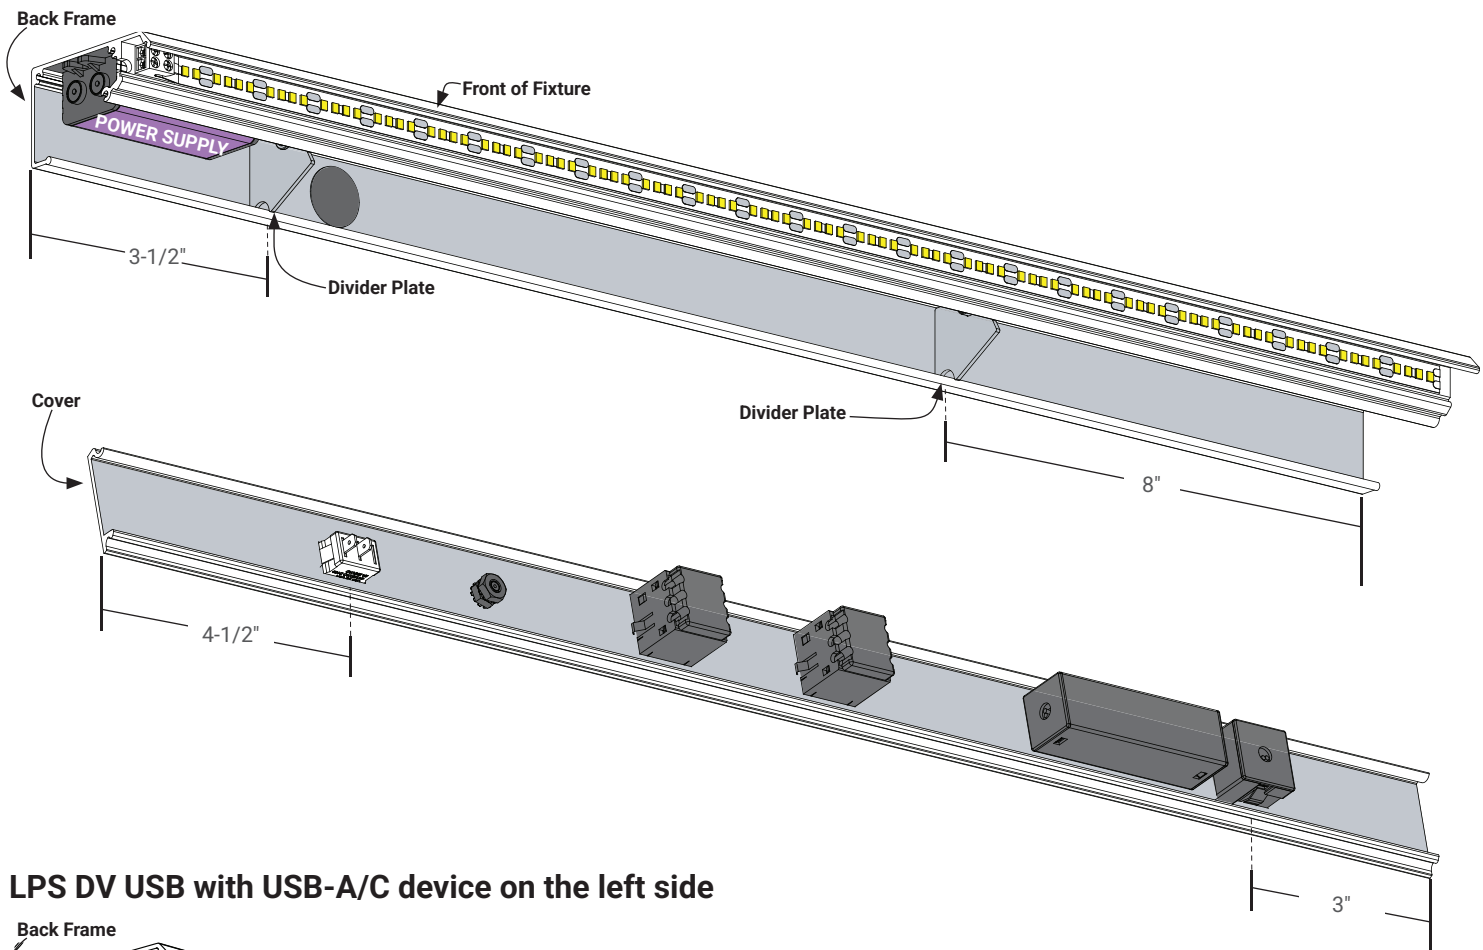

LPS DV USB with USB-A/C device on the left side

